

**SAMSUNG**

ELECTRONICS

Approval

Model No. :

Parts Code : V33A00026800

**Customer : TOSHIBA****DATE : 17 .Feb . 2009****SAMSUNG TFT-LCD****MODEL : LTA460HF03**Any Modification of Specification is not allowed without SEC's Permission.

NOTE :

<b>Customer's Approval</b>		APPROVAED BY <i>Kyunghwan Ko</i>	DATE 17 .Feb.2009
SIGNATURE	DATE	PREPARED BY <i>Seungil . Lee</i>	DATE 17 .Feb.2009

LCD Business

Samsung Electronics Co . , LTD.

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	1 / 29
-------	------------	---------	-----------------	------	--------



## Contents

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Optical Characteristics	(6)
3. Electrical Characteristics	(9)
3.1 TFT LCD Module	
3.2 Back Light Unit	
4. Block Diagram	(12)
5. Input Terminal Pin Assignment	(13)
5.1 Input Signal & Power	
5.2 Inverter Input Pin Configuration	
5.3 Inverter Input Power Sequence	
5.4 LVDS Interface	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
6. Interface Timing	(18)
6.1 Timing Parameters (DE only mode)	
6.2 Timing Diagrams of interface Signal (DE only mode)	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	(22)
8. Reliability Test	(23)
9. Packing	(25)
10. Marking & Others	(26)
11. General Precaution	(27)
11.1 Handling	
11.2 Storage	
11.3 Operation	
11.4 Operation Condition Guide	
11.5 Others	

**MODEL****LTA460HF03****Doc. No****06-002-S-090217****Page****2 / 29**

**\* Revision History**

Date	Rev. No	Page	Summary																				
Jan 02 , 2009	000	all	First issued																				
Jan 09 , 2009	001	4	Weight 12,300(Typ) → 13,500(Max)																				
		9	Power Consumption.																				
Feb 17 , 2009	002	6	CR change (min 3000→2000) , (max : 5000→3000)																				
			<table><tr><td></td><td>As-Is</td><td>To-Be</td></tr><tr><td>Rx</td><td>0.645</td><td>0.640</td></tr><tr><td>Ry</td><td>0.330</td><td>0.335</td></tr><tr><td>Gx</td><td>0.287</td><td>0.283</td></tr><tr><td>Gy</td><td>0.610</td><td>0.605</td></tr><tr><td>Bx</td><td>0.146</td><td>0.145</td></tr><tr><td>By</td><td>0.060</td><td>0.059</td></tr></table>		As-Is	To-Be	Rx	0.645	0.640	Ry	0.330	0.335	Gx	0.287	0.283	Gy	0.610	0.605	Bx	0.146	0.145	By	0.060
			As-Is	To-Be																			
Rx	0.645	0.640																					
Ry	0.330	0.335																					
Gx	0.287	0.283																					
Gy	0.610	0.605																					
Bx	0.146	0.145																					
By	0.060	0.059																					
12	Block Diagram (MB4→MB3)																						

MODEL

LTA460HF03

Doc. No

06-002-S-090217

Page

3 / 29

## General Description

### Description

LTA460HF03 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 46.0" is 1920 x 1080 and this model can display up to 16.7M colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV

### Features

- RoHS compliance (Pb-free)
- High contrast ratio & aperture ratio with wide color gamut
- SPVA(Super Patterned Vertical Align) mode
- Wide viewing angle ( $\pm 178^\circ$ )
- High speed response & Natural Motion (DFR:Double Frame Rate)
- FHD resolution (16:9)
- Low Power consumption
- Direct Type 16 CCFLs(Cold Cathode Fluorescent Lamp)
- DE(Data Enable) mode ( Need V sync from SET for Inverter sync signal )
- 4ch LVDS (Low Voltage Differential Signaling) interface (4pixel/clock)

## General Information

Items	Specification	Unit	Note
Module Size	1083(H <sub>TYP</sub> ) x 627(V <sub>TYP</sub> )	mm	± 1.0mm
	57.5 (D <sub>MAX</sub> )		
Weight	13,500	g	Max
Pixel Pitch	0.53025(H) x 0.53025(W)	mm	
Active Display Area	1018.08(H) x 572.67(V)	mm	
Surface Treatment	Haze 7% , Hard-coating (3H)		
Display Colors	FRC 8bit – 16.7M	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	500 (Typ.)	cd/m <sup>2</sup>	

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	4 / 29
-------	------------	---------	-----------------	------	--------

## 1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item	Symbol		Min.	Max.	Unit	Note
Power Supply Voltage	V <sub>DD</sub>		GND-0.5	13.2	V	(1)
Dimming Control	Max. Lum		-	5	V	
Storage temperature	T <sub>STG</sub>		-20	60	℃	(2)
Operating temperature	T <sub>OPR</sub>		0	50	℃	
Surface temperature	T <sub>SUR</sub>		0	60	℃	(3)
Shock ( non - operating )	S <sub>NOP</sub>	X,Y	-	40	G	(4)
		Z	-	30		
Vibration ( non - operating )	V <sub>NOP</sub>		-	1.5	G	(5)

Note (1)  $T_a = 25 \pm 2$  °C

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ( $T_a \leq 39$  °C)

b. Relative Humidity is 90% or less. ( $T_a > 39$  °C)

c. No condensation

(3) Although abnormal visual problems can be occurred in  $T_{SUR}$  range, the polarizer is not damaged in this range.

(4) 11ms, sine wave, one time for  $\pm X, \pm Y, \pm Z$  axis

(5) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

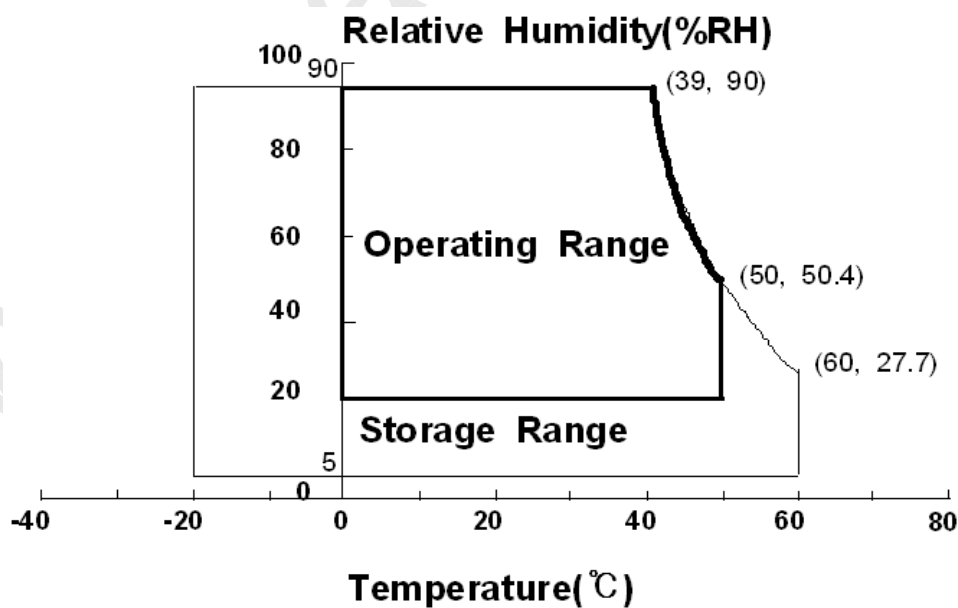


Fig. Temperature and Relative humidity range

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	5 / 29
-------	------------	---------	-----------------	------	--------

## 2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3, ELDIM EZ-Contrast

(Ta = 25 ± 2 °C, VDD=12V, fv= 120Hz, f<sub>DCLK</sub>=297MHz, I<sub>L</sub> = 11 mArms)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R	Normal $\theta_{L,R}=0$ $\theta_{U,D}=0$  Viewing Angle	2,000	3,000	-		(1) SR-3
Response Time	Rising	Tr		-	10	13	msec	(3) RD-80S
	Falling	Tf		-	6	10		
	G-to-G	Tg		-	6	-		
Luminance of White (Center of screen)		Y <sub>L</sub>		400	500	-	cd/m <sup>2</sup>	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.640 0.335 0.283 0.605 0.145 0.059 0.280 0.290	TYP. +0.03		(5),(6) SR-3
		Ry						
	Green	Gx						
		Gy						
	Blue	Bx						
		By						
	White	Wx						
		Wy						
Color Gamut		-		-	72	-	%	(5) SR-3
Color Temperature		-		-	10,000	-	K	
Viewing Angle	Hor.	$\theta_L$	C/R≥10	75	89	-	Degree	(6) EZ-Contrast
		$\theta_R$		75	89	-		
	Ver.	$\theta_U$		75	89	-		
		$\theta_D$		75	89	-		
White Brightness Uniformity (9 Points)		B <sub>uni</sub>		-	-	25	%	(2) SR-3


### - Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.


Environment condition : Ta = 25 ± 2 °C

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	6 / 29
-------	------------	---------	-----------------	------	--------

Photo detector	Field
SR-3	1°
BM-7	2°

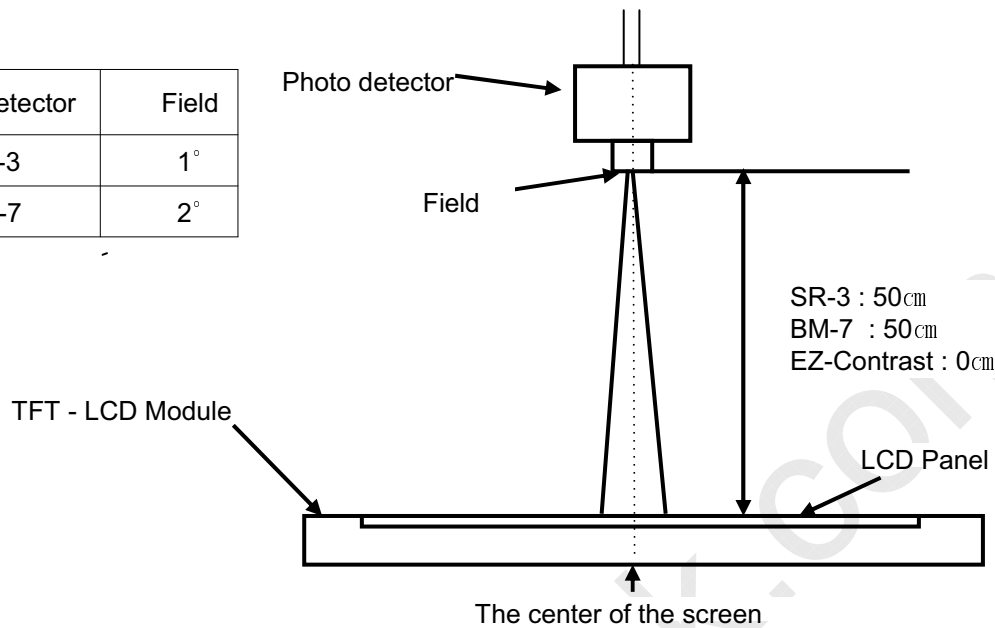

#### - Definition of test point

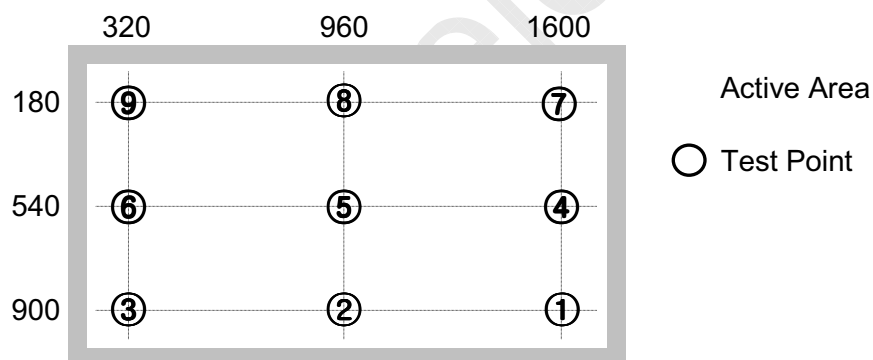

#### Note (1) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G_{\max}}{G_{\min}}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black


Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White )

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

B<sub>max</sub> : Maximum brightness

B<sub>min</sub> : Minimum brightness

Note (3) Definition of Response time : Sum of T<sub>r</sub>, T<sub>f</sub>

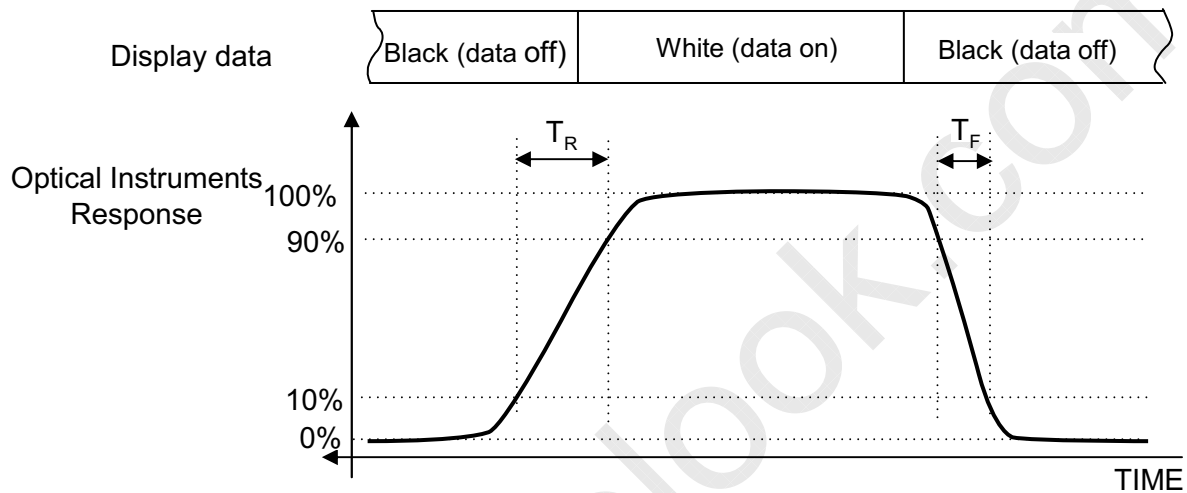


Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle

: Viewing angle range (C/R ≥ 10)

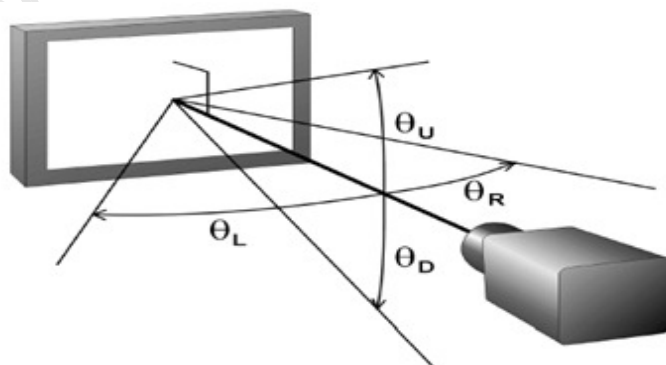



### 3. Electrical Characteristics

#### 3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V <sub>DD</sub>	10.8	12	13.2	V	(1)
Current of Power Supply	(a) Black	I <sub>DD</sub>	-	1,200	-	mA	(2),(3)
	(b) White		-	1,250	-	mA	
	(c) N-pattern		-	2,250	2,550	mA	
Vsync Frequency		f <sub>V</sub>	95	120	125	Hz	
Hsync Frequency		f <sub>H</sub>	120	135	140	kHz	
Main Frequency		f <sub>DCLK</sub>	260	297	310	MHz	
Rush Current		I <sub>RUSH</sub>	-	-	7	A	(4)

Note (1) The ripple voltage should be controlled under 10% of  $V_{DD}$ .

(2)  $f_V=120\text{Hz}$ ,  $f_{DCLK} = 297\text{MHz}$ ,  $V_{DD} = 12.0\text{V}$ , DC Current.

(3) Power dissipation check pattern (LCD Module only)



a) Black Pattern




b) White Pattern



c) N-pattern

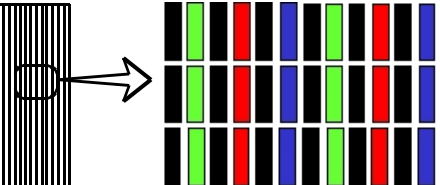

#### (4) Measurement Conditions

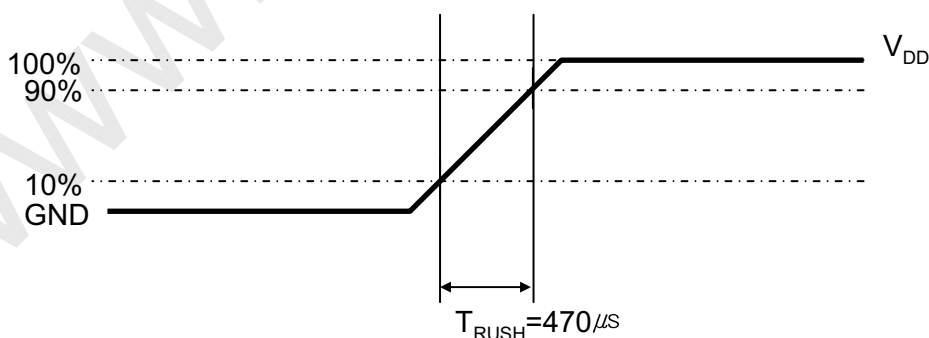


Rush Current  $I_{RUSH}$  can be measured when  $T_{RUSH}$  is  $470\mu\text{s}$ .

### 3.2 Back Light Unit

The back light unit contains 16 direct-lighting type CCFLs ( Cold Cathode Fluorescent Lamp )

$T_a = 25 \pm 2^\circ\text{C}$

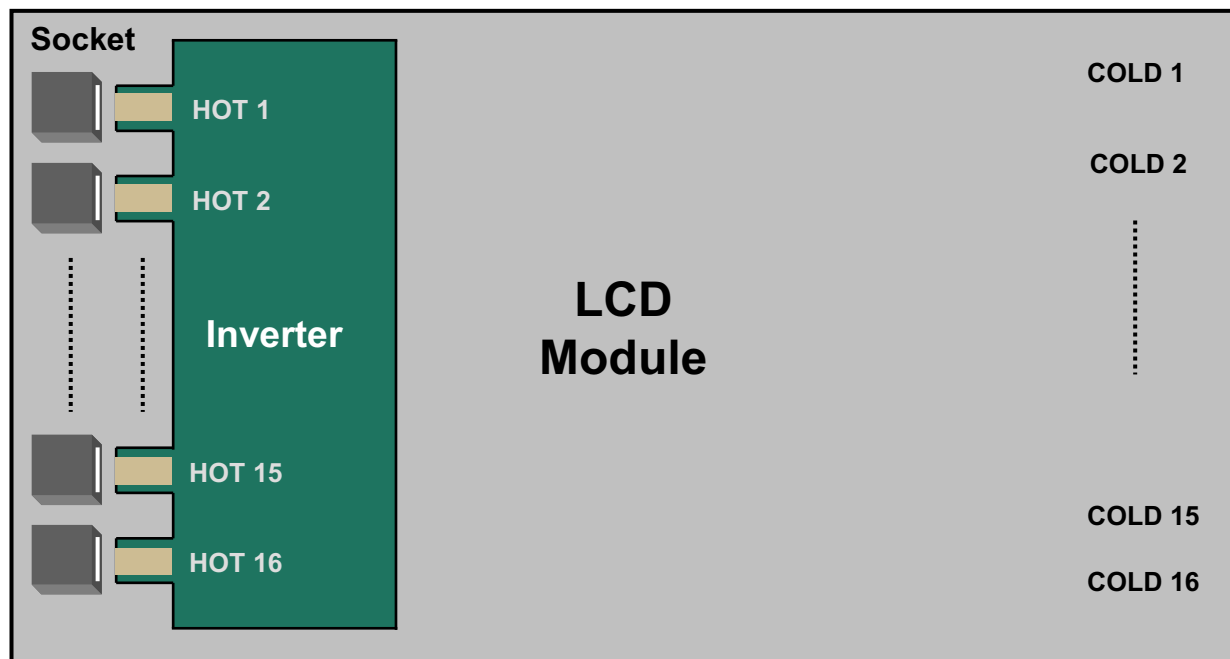

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp Voltage	$V_L$	-	1,140	-		
Operating Life Time	Hr	50,000	-	-	Hour	(1)
Start-up Voltage	$V_s$	-	-	0°C : 1,840 25°C : 1,580	Vrms	

Note (1) Life time (Hr) of a lamp : It is Defined as the time in which it continues to operate under the condition of  $T_a = 25 \pm 2^\circ\text{C}$  for a lamp until the brightness becomes 50% or lower than it's original value.

### 3.3 Inverter Input Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	V <sub>in</sub>	-	22	24	26	V	Ta=25± 2 °C
Input Current	I <sub>RUSH</sub>	V <sub>in</sub> =24.0V V <sub>dim</sub> =3.3V	-	8.5	9.4	A	(1)
			-	7.5	8.25		(2)
Lamp Current	I <sub>O,MAX</sub>	V <sub>dim</sub> =3.3 V	10.0	10.5	11.0	mArms	-
Frequency	F <sub>LAMP</sub>	V <sub>in</sub> =24.0 V	31	32.5	34	kHz	-
Backlight On/Off	ON	V <sub>in</sub> =24.0 V	2.4	-	5.5	V	-
	OFF	V <sub>in</sub> =24.0 V	0	-	0.8		
Dimming Control	V <sub>DIM</sub>	Max. Lum (PWM=100%)	3.3	-	-	V	-
		Min. Lum (PWM=20%)	-	0	-		

Note) Power Consumption is measured when 500[cd/m ] of luminance which is the typical luminance.  
Lamp Current is measured at the point before Lamp.

(1) Max Value of the Power Consumption is measured during initial turn on time\* of the backlight

(2) Max Value of the Power Consumption is measured after 60 min warm-up.

\* Initial turn-on time : From 0sec to 60min after turn-on

MODEL

LTA460HF03


Doc. No

06-002-S-090217

Page

11 / 29

#### 4. Block Diagram

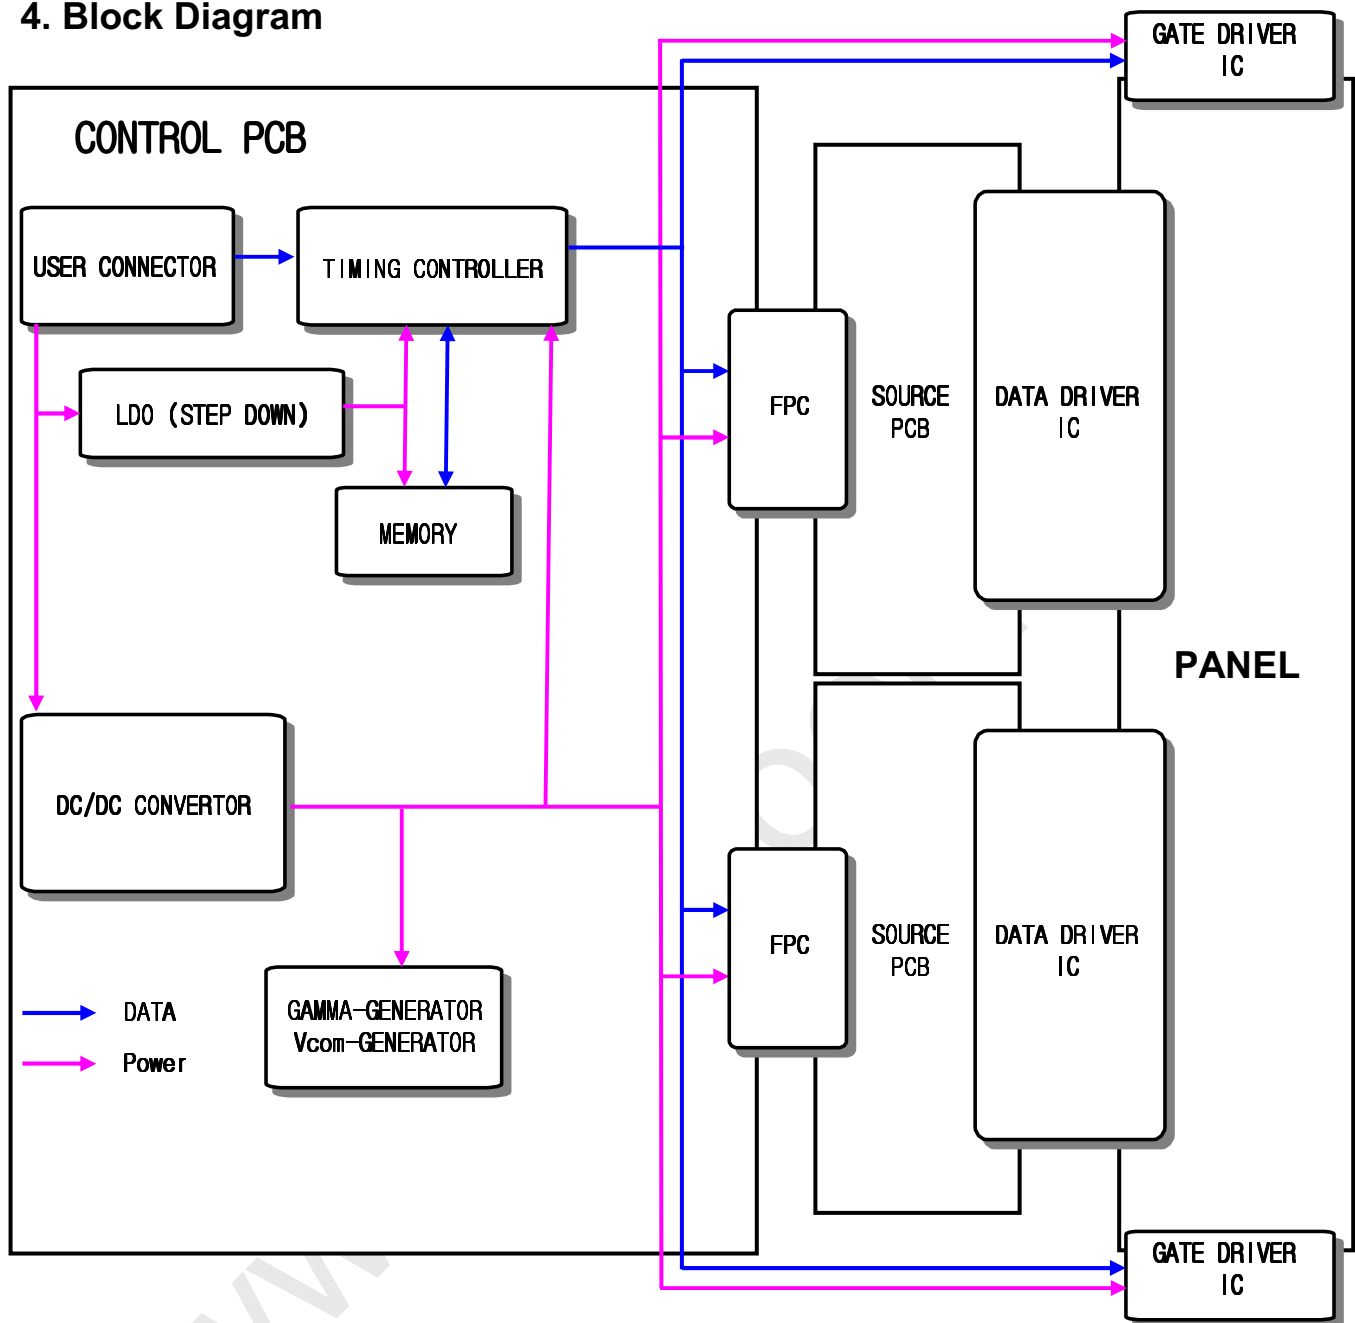

## 5. Input Terminal Pin Assignment

### 5.1. Input Signal & Power

Connector : FI-RE41S-HF (JAE/UJU)

Pin	Description		Pin	Symbol	Description
1	Vdd(12V)		21	ODD LVDS SIGNAL	Rx1[3]P
2	Vdd(12V)		22		Rx1[4]N
3	Vdd(12V)		23		Rx1[4]P
4	Vdd(12V)		24		GND
5	Vdd(12V)		25		Rx3[0]N
6	No Connection or GND		26		Rx3[0]P
7	GND		27		Rx3[1]N
8	GND		28		Rx3[1]P
9	GND		29		Rx3[2]N
10	ODD LVDS SIGNAL	Rx1[0]N	30		Rx3[2]P
11		Rx1[0]P	31		GND
12		Rx1[1]N	32		Rx3CLK-
13		Rx1[1]P	33		Rx3CLK+
14		Rx1[2]N	34		GND
15		Rx1[2]P	35		Rx3[3]N
16		GND	36		Rx3[3]P
17		Rx1CLK-	37		Rx3[4]N
18		Rx1CLK+	38		Rx3[4]P
19		GND	39	GND	
20	Rx1[3]N	40	No Connection		
			41	No Connection	

Note) No Connection: This PINS are only used for SAMSUNG internal using.

MODEL

LTA460HF03

Doc. No

06-002-S-090217

Page

13 / 29

## 5.1.2 Input Signal &amp; Power

Connector : FI-RE51S-HF (JAE/UJU)

Pin	Description		Pin	Description	
1	Vdd(12V)		26	EVEN LVDS SIGNAL	Rx4[0]P
2	Vdd(12V)		27		Rx4[1]N
3	Vdd(12V)		28		Rx4[1]P
4	Vdd(12V)		29		Rx4[2]N
5	Vdd(12V)		30		Rx4[2]P
6	No Connection or GND		31		GND
7	GND		32		Rx4CLK-
8	GND		33		Rx4CLK+
9	GND		34		GND
10	EVEN LVDS SIGNAL	Rx2[0]N	35		Rx4[3]N
11		Rx2[0]P	36		Rx4[3]P
12		Rx2[1]N	37		Rx4[4]N
13		Rx2[1]P	38		Rx4[4]P
14		Rx2[2]N	39	GND	
15		Rx2[2]P	40	No Connection	
16		GND	41	No Connection	
17		Rx2CLK-	42	No Connection	
18		Rx2CLK+	43	No Connection	
19		GND	44	No Connection	
20		Rx2[3]N	45	LVDS Option * Note1	
21		Rx2[3]P	46	No Connection	
22		Rx2[4]N	47	No Connection	
23		Rx2[4]P	48	No Connection	
24		GND	49	No Connection	
25		Rx4[0]N	50	No Connection	
			51	No Connection	

(NOTE1) No connection : This Pins are only used for SAMSUNG internal using

(1) LVDS OPTION : If this PIN HIGH ( 3.3V ) → Normal LVDS format

LOW ( GND or N.C ) → JEIDA LVDS format

SEQUECE : ON = VDD(T1) ≥ LVDS Option ≥ Interface Signal(T2)

OFF = Interface Signal(T3) ≥ LVDS Option ≥ VDD

MODEL

LTA460HF03

Doc. No

06-002-S-090217

Page

14 / 29

Note) Pin number starts from Right side

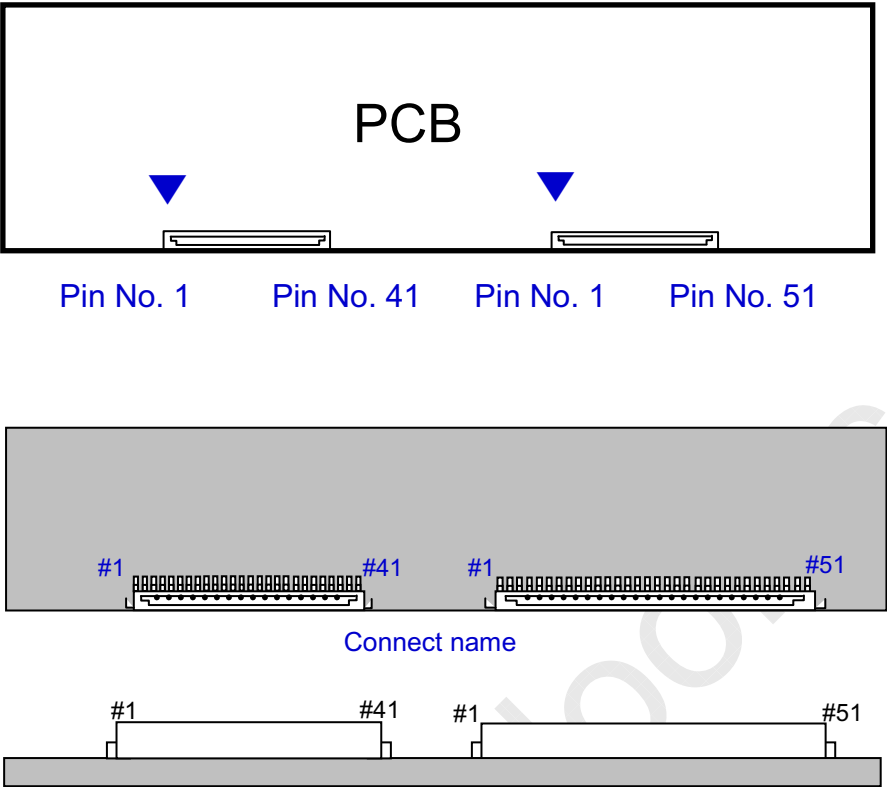


Fig. Connector diagram

- a. All GND pins should be connected together and also be connected to the LCD's metal chassis.
- b. All power input pins should be connected together.
- c. All NC pins should be separated from other signal or power.


MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	15 / 29
-------	------------	---------	-----------------	------	---------

## 5.2. Inverter Input Pin Configuration

Connector : 2002WR-14B1[Yeonho]

Pin No.	Pin Configuration (Master/Slave)
1	24 V
2	24 V
3	24 V
4	24 V
5	24 V
6	GND
7	GND
8	GND
9	GND
10	GND
11	Error Out [ Normal : GND, Abnormal : Open Collector ]
12	Backlight On /Off [ON: 2.4 ~ 5.5 V, OFF: 0 ~ 0.8 V]
13	Dimming Control [0V:Min, 3.3V:Max]
14	No Connection

## 4.3. Inverter Input Power Sequence

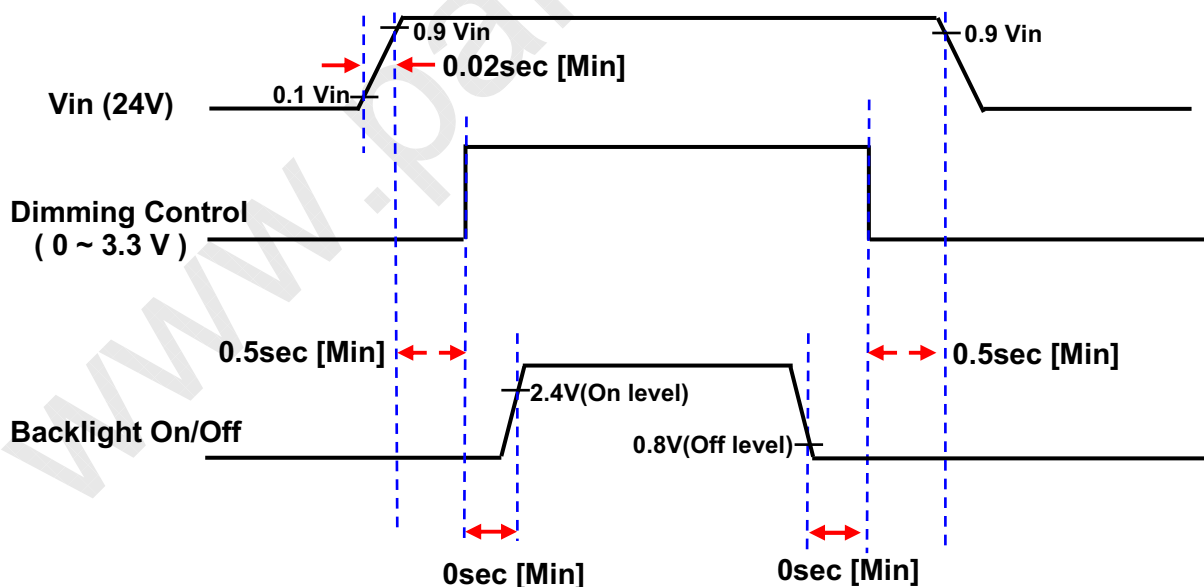

Note) SEQUENCE : ON = Vin(24V) > Dimming Control ≥ Backlight On/Off  
OFF = Backlight On/Off ≥ Dimming Control > Vin(24V)

MODEL

LTA460HF03

Doc. No

06-002-S-090217

Page

16 / 29



## 5.4 LVDS Interface

- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA & Normal)

	LVDS pin	JEIDA -DATA	VESA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R4	R0
	TxIN/RxOUT1	R5	R1
	TxIN/RxOUT2	R6	R2
	TxIN/RxOUT3	R7	R3
	TxIN/RxOUT4	R8	R4
	TxIN/RxOUT6	R9	R5
	TxIN/RxOUT7	G4	G0
TxOUT/RxIN1	TxIN/RxOUT8	G5	G1
	TxIN/RxOUT9	G6	G2
	TxIN/RxOUT12	G7	G3
	TxIN/RxOUT13	G8	G4
	TxIN/RxOUT14	G9	G5
	TxIN/RxOUT15	B4	B0
	TxIN/RxOUT18	B5	B1
TxOUT/RxIN2	TxIN/RxOUT19	B6	B2
	TxIN/RxOUT20	B7	B3
	TxIN/RxOUT21	B8	B4
	TxIN/RxOUT22	B9	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DE
TxOUT/RxIN3	TxIN/RxOUT27	R2	R6
	TxIN/RxOUT5	R3	R7
	TxIN/RxOUT10	G2	G6
	TxIN/RxOUT11	G3	G7
	TxIN/RxOUT16	B2	B6
	TxIN/RxOUT17	B3	B7
	TxIN/RxOUT23	RESERVED	RESERVED
TxOUT/RxIN4	TxIN/RxOUT28	R0	R8
	TxIN/RxOUT29	R1	R9
	TxIN/RxOUT30	G0	G8
	TxIN/RxOUT31	G1	G9
	TxIN/RxOUT32	B0	B8
	TxIN/RxOUT33	B1	B9
	TxIN/RxOUT34	RESERVED	RESERVED

<b>MODEL</b>	<b>LTA460HF03</b>	<b>Doc. No</b>	<b>06-002-S-090217</b>	<b>Page</b>	<b>17 / 29</b>
--------------	-------------------	----------------	------------------------	-------------	----------------

## 5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																												GRAY SCALE LEVEL		
		RED										GREEN										BLUE										
		R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	G0	G1	G2	G3	G4	G5	G6	G7	G8	G9	B0	B1	B2	B3	B4	B5	B6	B7		B8	B9
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-	
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-	
	CYAN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-	
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	MAGENTA	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	DARK ↑  ↓ LIGHT	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1021
	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1022
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1023
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑  ↓ LIGHT	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1
		0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1021
	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1022	
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1023
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	DARK ↑  ↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	B1021
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	B1022	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	B1023

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

MODEL

LTA460HF03

Doc. No

06-002-S-090217

Page

18 / 29

## 6. Interface Timing

### 6.1 Timing Parameters ( DE only mode )

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	260	297	310	MHz	-
Hsync		$F_H$	120	135	140	KHz	-
Vsync		$F_V$	95	120	135	Hz	-
Vertical Display Term	Active Display Period	$T_{VD}$	-	1080	-	Lines	-
	Vertical Total	$T_V$	1092	1125	1380	Lines	-
Horizontal Display Term	Active Display Period	$T_{HD}$	-	1920	-	Clocks	-
	Horizontal Total	$T_H$	2092	2200	2348	clocks	-

Note) This product is DE only mode but Need V sync from SET for Inverter sync signal

(1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system


(2) Internal  $V_{DD} = 3.3V$

(3) Spread Spectrum

- Modulation Rate ( Max ) :  $\pm 1.5\%$


- Modulation Frequency ( Max ) : 300KHz

## 6.2 Timing diagrams of interface signal ( DE only mode )

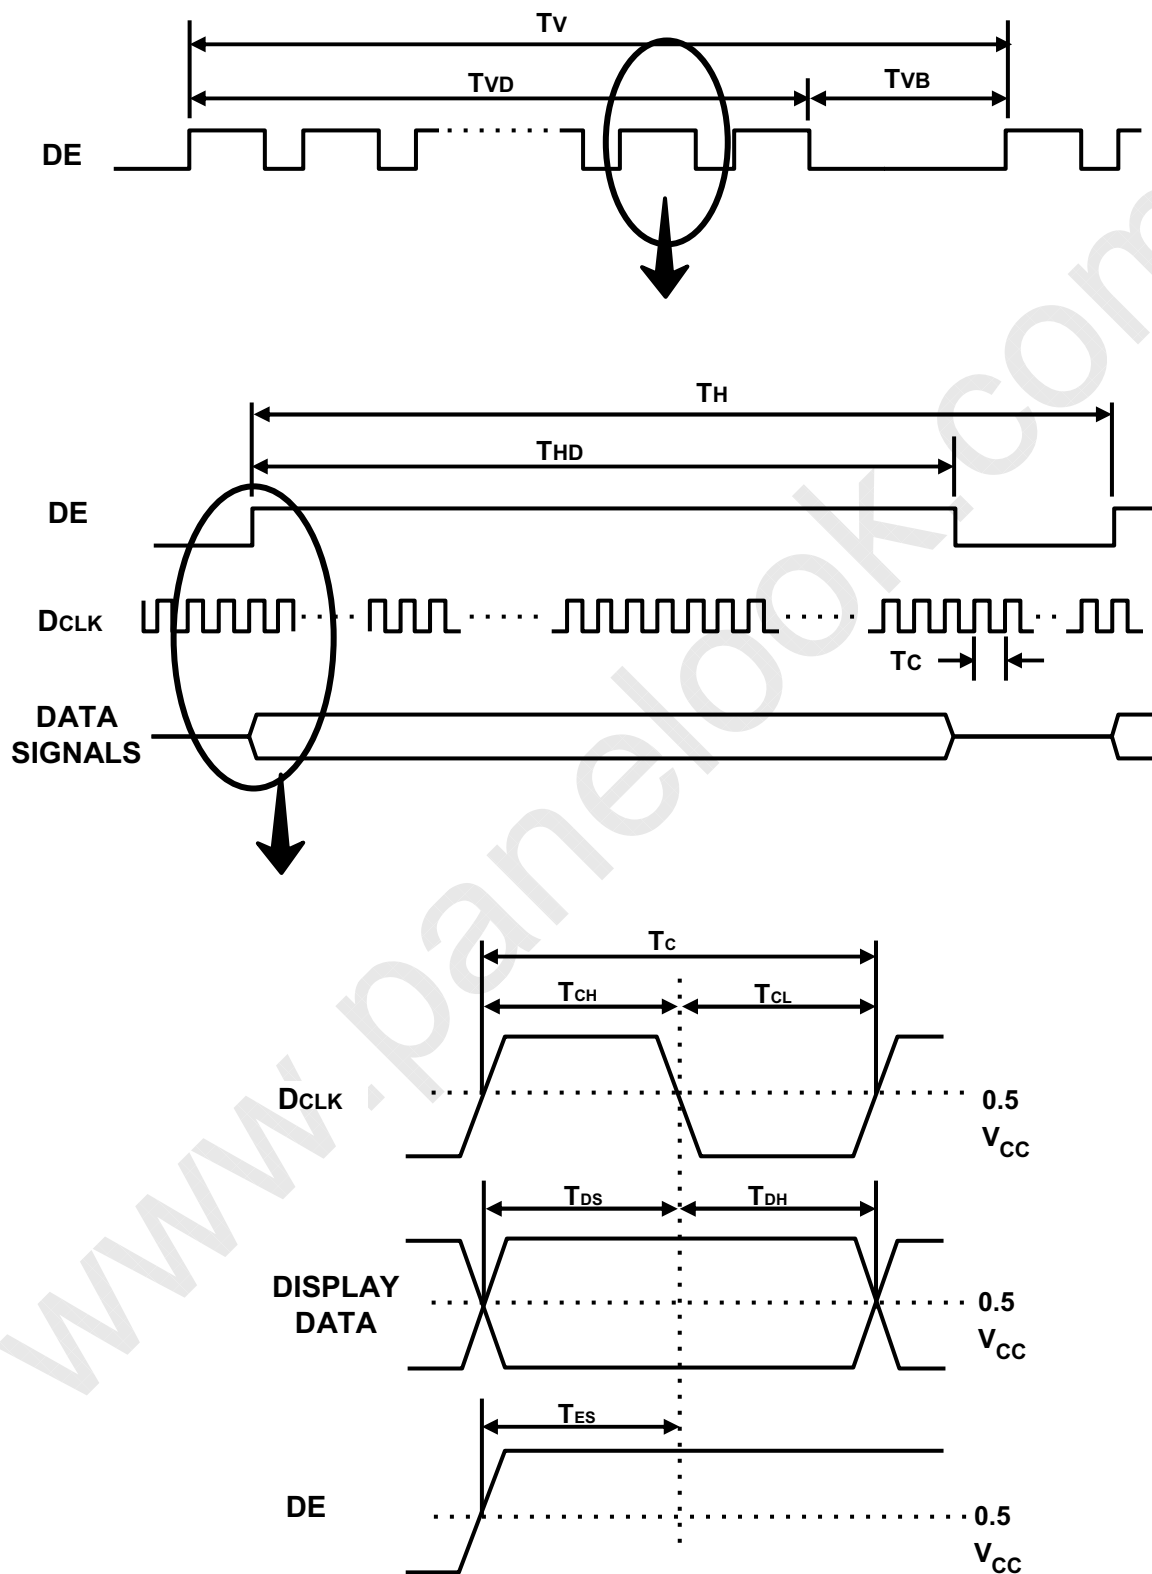

### 6.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

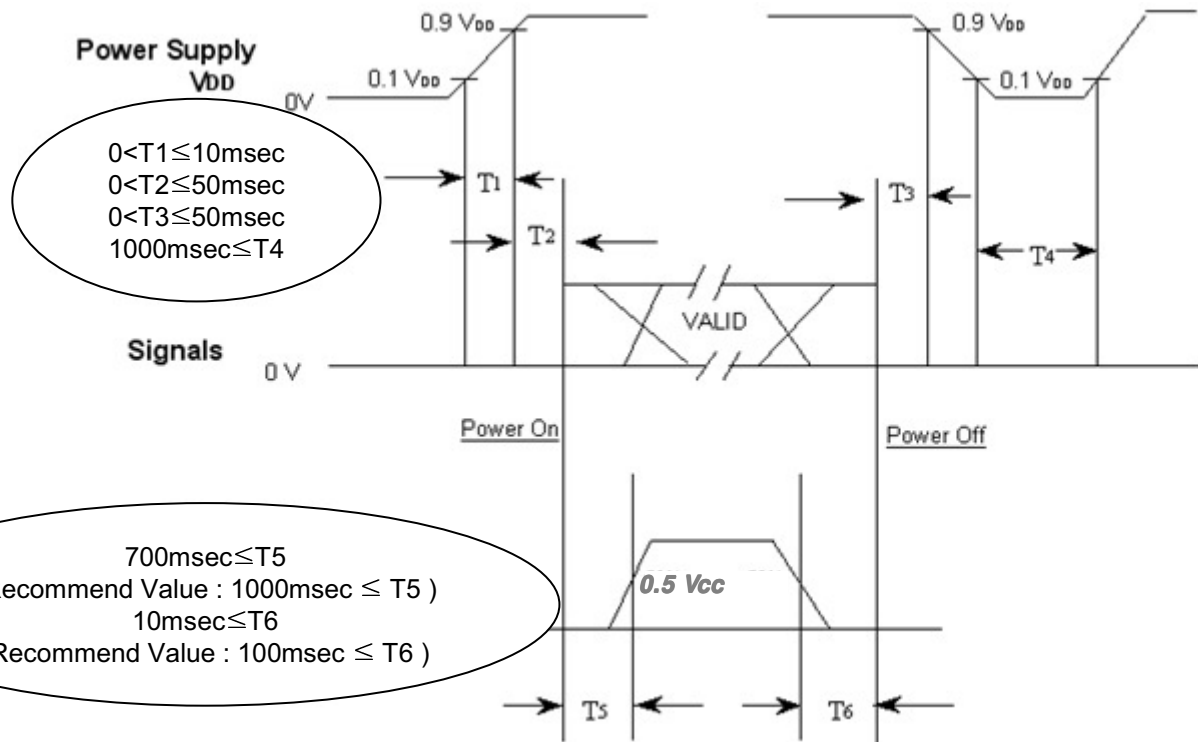

$T1$  :  $V_{DD}$  rising time from 10% to 90%

$T2$  : The time from  $V_{DD}$  to valid data at power ON.

$T3$  : The time from valid data off to  $V_{DD}$  off at power Off.


$T4$  :  $V_{DD}$  off time for Windows restart

$T5$  : The time from valid data to B/L enable at power ON.

$T6$  : The time from valid data off to B/L disable at power Off.


- The supply voltage of the external system for the Module input should be the same as the definition of  $V_{DD}$ .
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of  $V_{DD}$  = off level, please keep the level of input signals low or keep a high impedance.
- $T4$  should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.
- In Case  $T5$  is less than 1000msec and  $T6$  is less than 100msec, Garbage Display can be seen. (It is not related to electrical function issue, Just for recommendation to prevent Garbage Display )

## 7.Outline Dimension

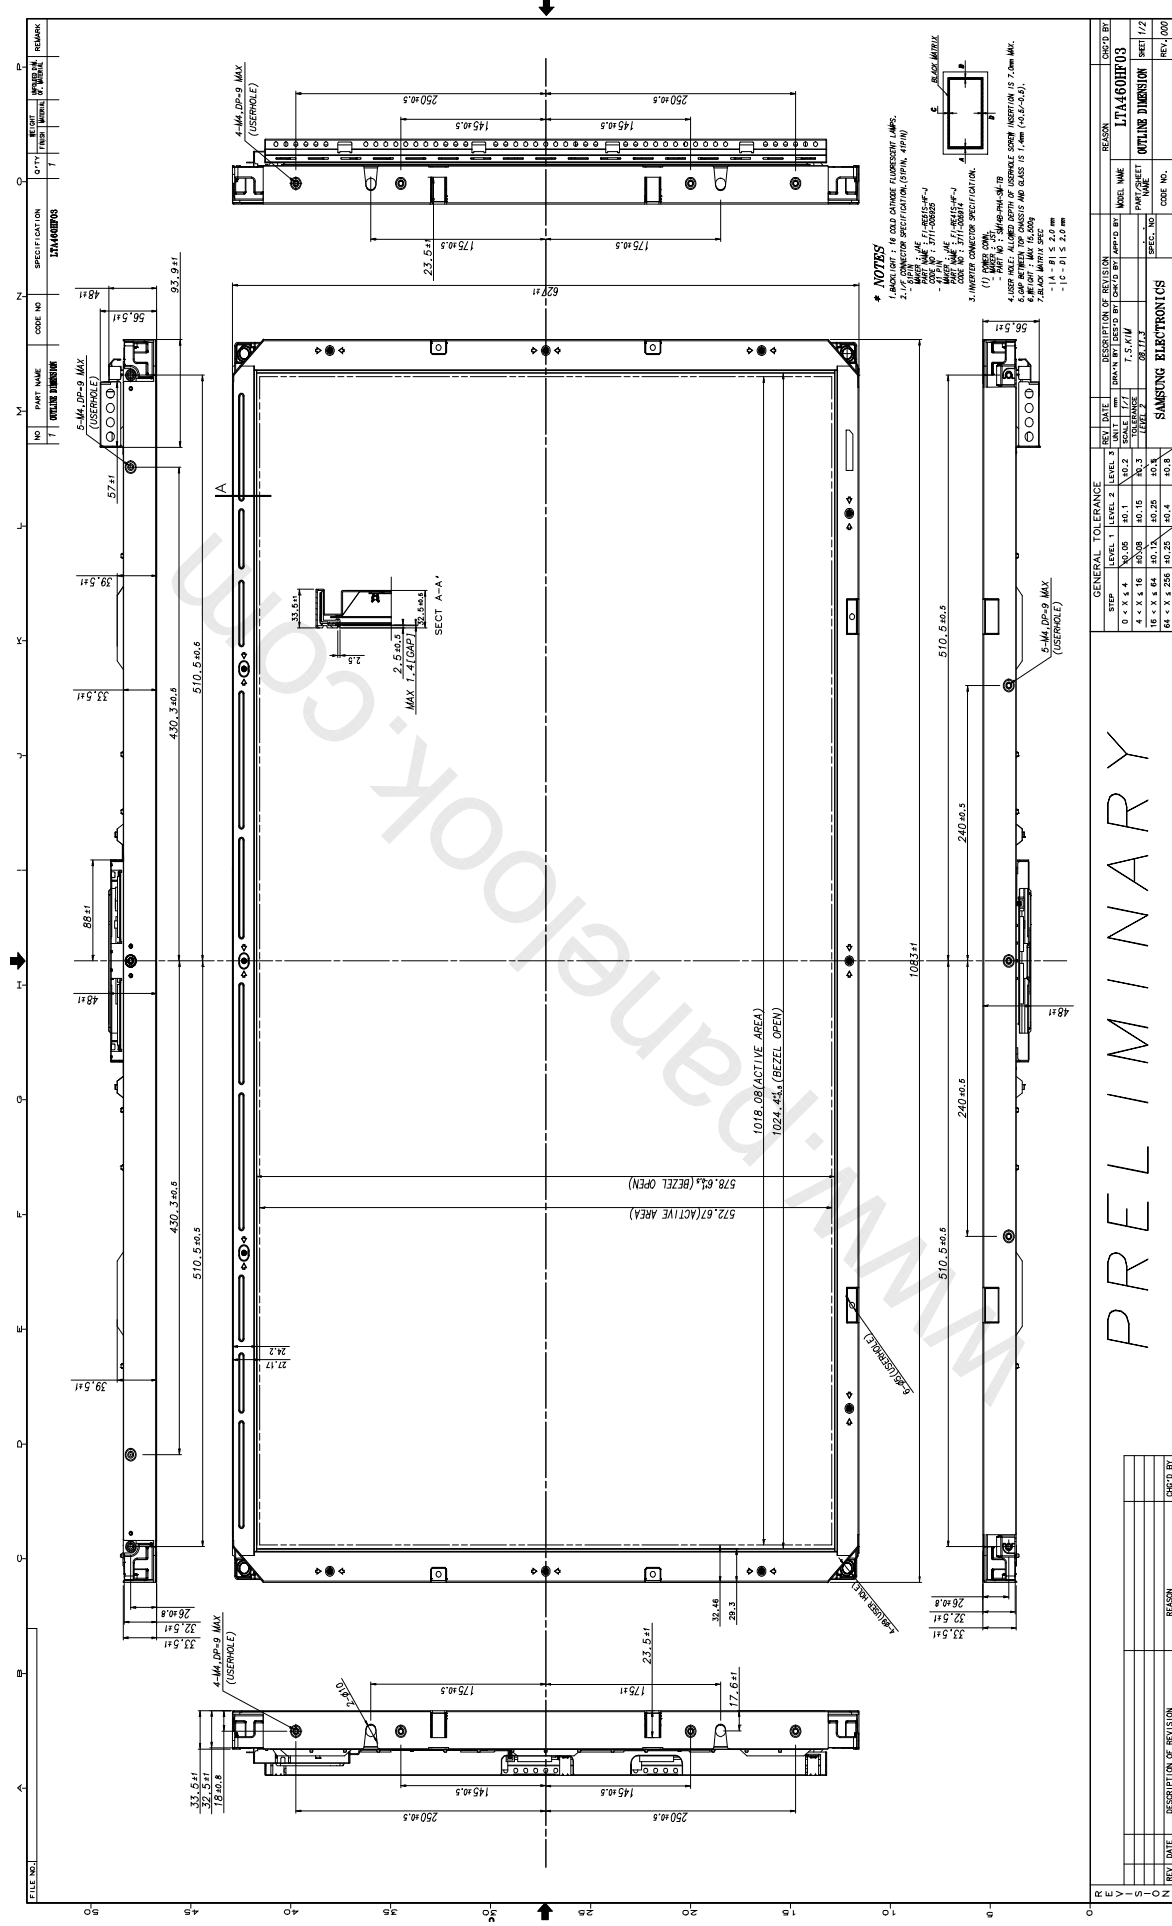

Model	LTA460HF03	Doc. No	06-002-S-090217	Model	22/29
-------	------------	---------	-----------------	-------	-------

7.Outline Dimension

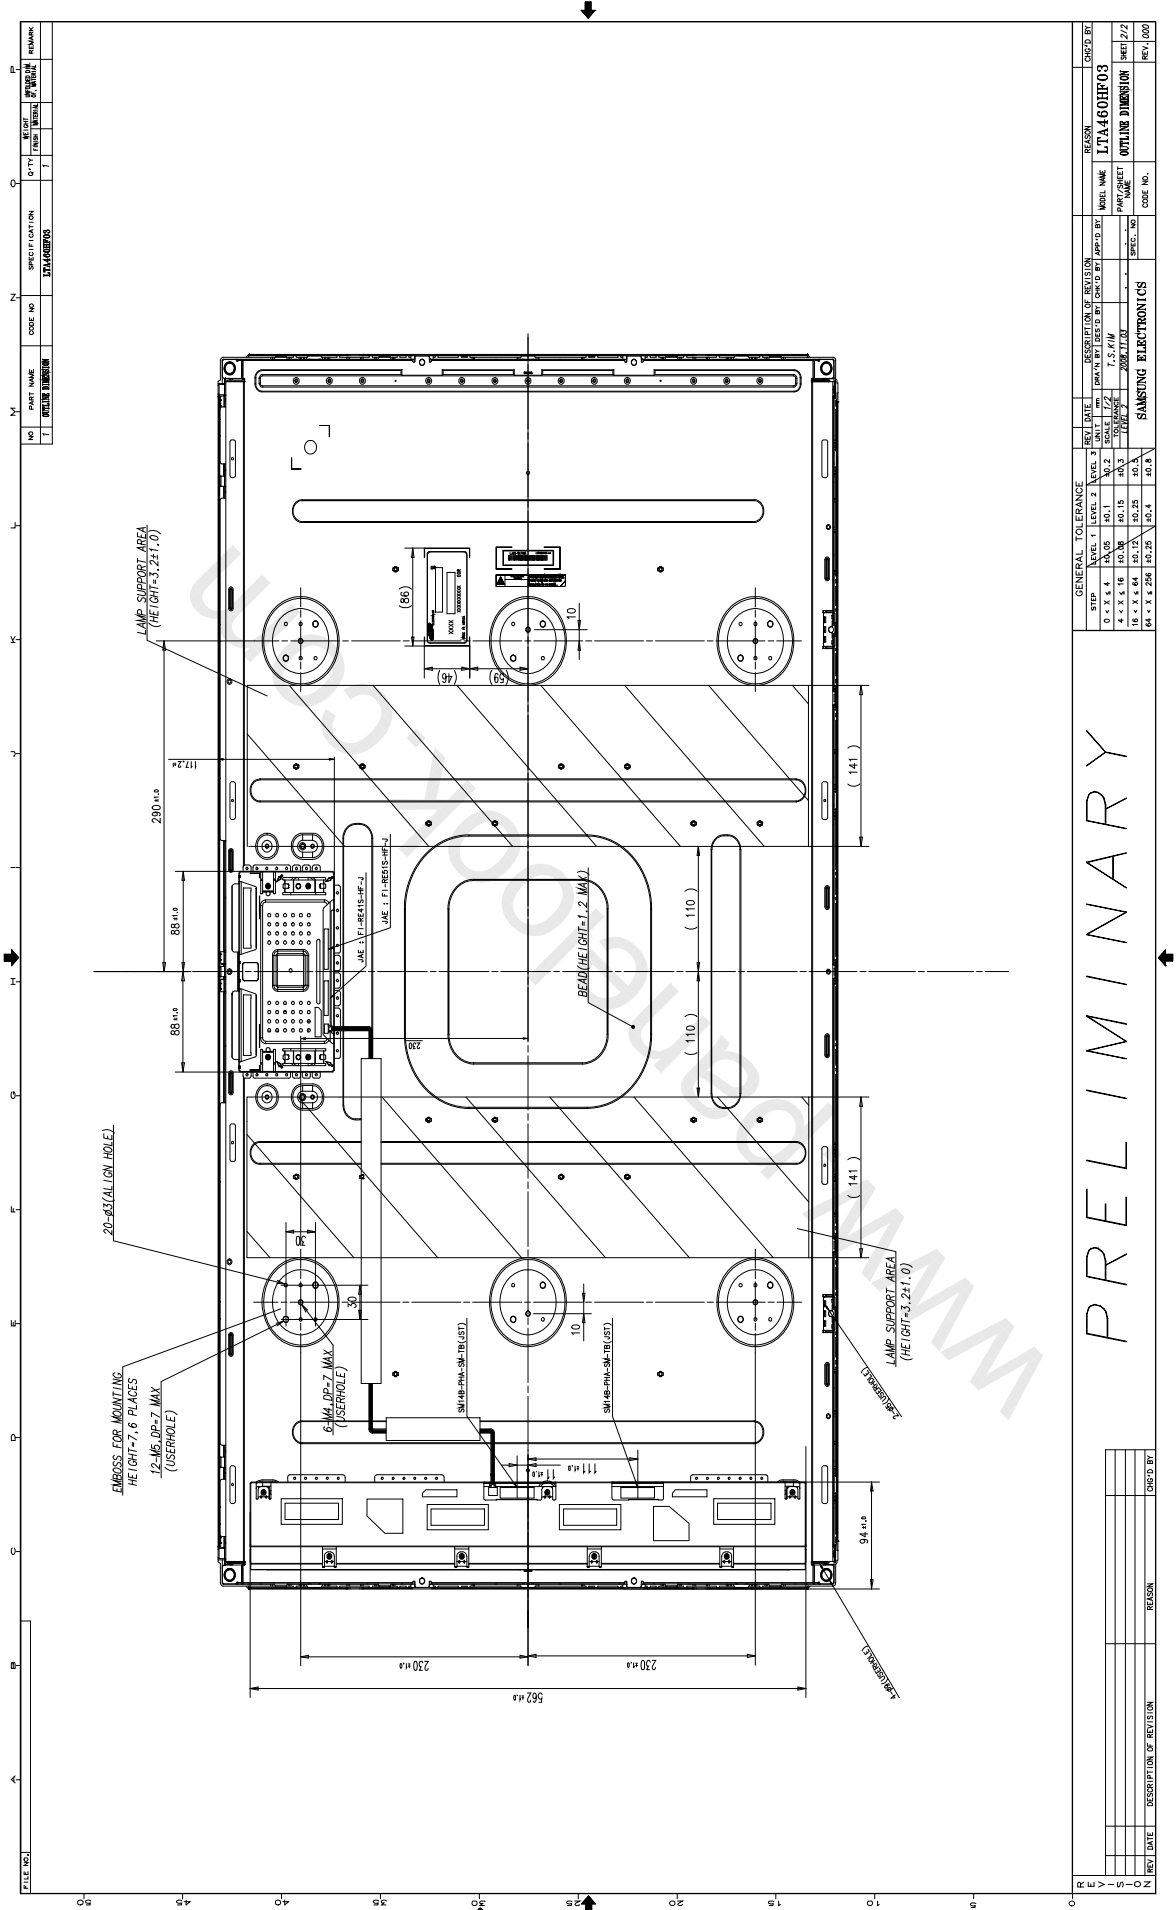

Model	LTA460HF03	Doc. No	06-002-S-090217	Model	23/29
-------	------------	---------	-----------------	-------	-------

## 8. Reliability Test

Item	Test condition	Quantity
Temperature Step Stress	-20 ~ 60 °C, 10Cycle determination	4EA
HTOL	50 °C, 500hr determination	4EA
LTOL	0 °C, 500hr determination	4EA
HTS	70 °C, 500hr determination	4EA
LTS	-30 °C, 500hr determination	4EA
THB	40 °C / 95%RH, 500hr determination	4EA
WHTS	60 °C / 75%RH, 500hr determination	4EA
Thermal Shock	-20 °C ~ 60 °C, 200cycle determination	4EA
ESD(operation)	contact : $\pm 8$ kV, 150pF/330 $\Omega$ , 200Point, 1 time/Point non-contact : $\pm 15$ kV, 150pF/330 $\Omega$ , 200Point, 1 time/Point	3EA
Input Con.ESD (Non-operation)	contact : $\pm 2$ kV, 150pF/330 $\Omega$ , Input Con.Pin, 3 times/Pin	3EA
POWER ON/OFF	30sec (on) / 30sec(off) : 12,000 times	4EA
Vibration	10~300Hz/1.5G/10minSR, XYZ, 30min/axis	3EA
Shock	Half Sine, 40G, 11msec, $\pm$ X,Y 1time/axis Half Sine, 30G, 11msec, $\pm$ Z 1time/axis	3EA
PALLET Vibration	1.05Grms 5~200Hz 1hr	1PALLET(10EA)
PALLET Drop	4 edge 1face(bottom) 20 cm	1PALLET(10EA)

### [ Result Evaluation Criteria]

Under the display quality test conditions with normal operation state, these should be no change which may affect practical display functions.

- \* HTOL/ LTOL : High/Low Temperature Operating Life
- \*\* THB : Temperature Humidity Bias
- \*\*\* HTS/LTS : High/Low Temperature Storage
- \*\*\*\* WHTS : Wet High Temperature Storage

MODEL

LTA460HF03

Doc. No

06-002-S-090217

Page

24 / 29




## 9. PACKING

### 9.1 CARTON (Internal Package)

#### (1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

#### (2) Packing Method

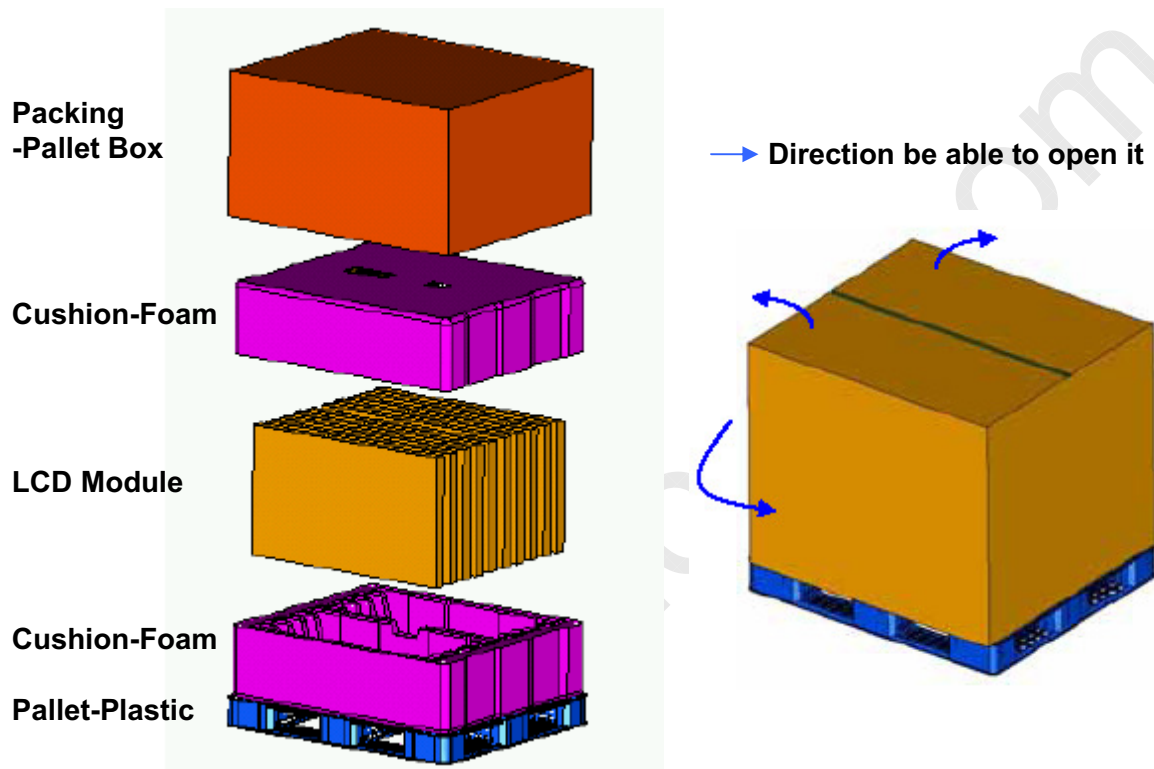

### 9.2 Packing Specification

Item	Specification	Remark
LCD Packing	10ea / (Packing-Pallet Box)	1. 150Kg / LCD (10ea) 2. 10 Kg / Cushion-pallet (2ea) 3. 8 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 8.8kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1270mm(H) x 1150mm(V) x 844mm(height)
Total Pallet Weight	177 kg	Pallet(8.8kg) + Module (150kg) + Cushion (up + bottom =10kg) + Pallet-BOX(8kg)

**MODEL****LTA460HF03****Doc. No****06-002-S-090217****Page****25 / 29**


## 10. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1) Part number : LTA460HF03

(2) Revision: Three letters


(3) Lot number : X X X X XXX XX X

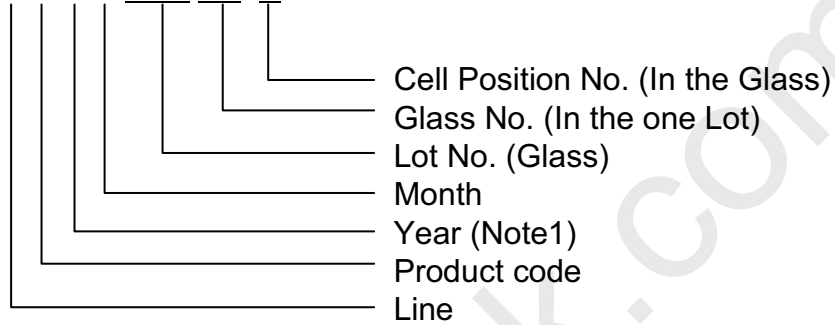

(4) Nameplate Indication

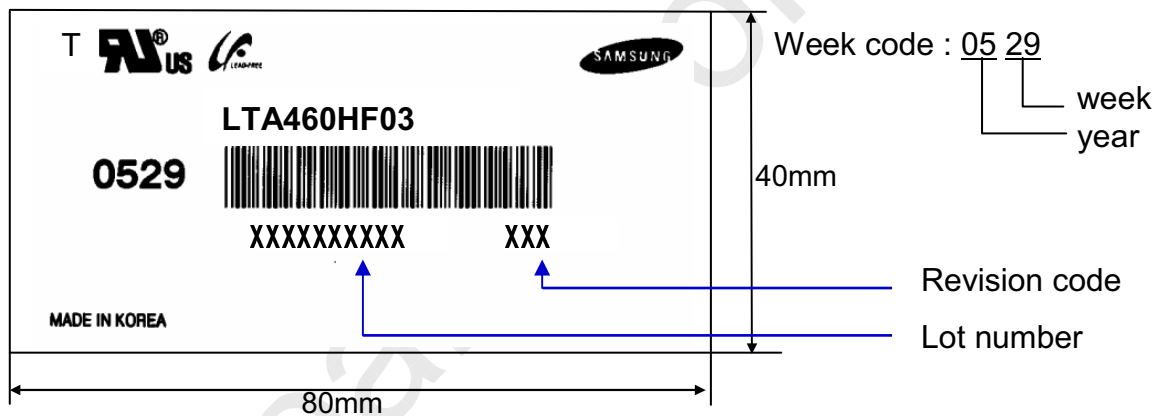

(5) Packing box attach

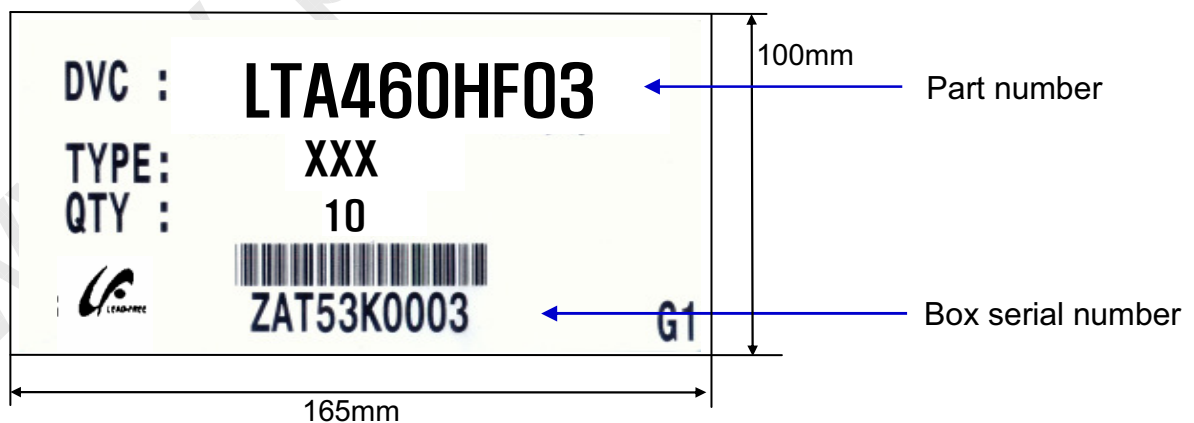

(6) Others

1. After service part

Lamps cannot be replaced because of the narrow bezel structure.

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	26 / 29
-------	------------	---------	-----------------	------	---------

## 11. General Precautions

### 11.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.  
In addition to damage, this may cause improper operation or damage to the Module and CCFT back light.
- (d) Note that polarizers are very fragile and could be damage easily.  
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.  
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of inverter & LVDS board
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handling a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	27 / 29
-------	------------	---------	-----------------	------	---------

## 11.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35℃ and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

## 11.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).

## 11.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.  
Normal condition is defined as below;
  - Temperature :  $20 \pm 15^{\circ}\text{C}$
  - Humidity :  $55 \pm 20\%$
  - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	28 / 29
-------	------------	---------	-----------------	------	---------

## 11.5 Others

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. ( supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)  
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.  
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL	LTA460HF03	Doc. No	06-002-S-090217	Page	29 / 29
-------	------------	---------	-----------------	------	---------